

Fuqing F17 Formply



Fuqing F17 Formply is made with high-quality hardwood veneers bonded with waterproof phenolic resin glue, ensuring superior strength and moisture resistance. Its smooth film coating provides a non-stick surface for concrete, allowing for easy removal and multiple reuses.

Fuqing F17 Formply is an essential material in construction and industrial applications, offering strength, durability, and moisture resistance. Whether for concrete formwork, structural work, or heavy-duty flooring, it provides long-lasting performance and cost efficiency. If you need a reliable and high-strength plywood, F17 Formply is the perfect choice.



Office: Fuqing Shanghai

Address: No.2902 Room, 166 Street, Minhong Road, Minhang District, Shanghai

Factory location in China: Fuqing Wood

Address: Changfu Road, Lanhong Village, Qingyihu Town, Shuyang County, Jiangsu, China

Factory location in Vietnam: Fuqing Vietnam

Address: Heyi Village, Shengxing town, Anping County, Yenbai Province, Vietnam

Tel: 0527-8063 3096

E-mail: postmaster@fuqingmuye.com

Web: <http://www.fuqingmuye.com>

Fuqing F17 Formply Specification

F17 Formply	
Specification	12/15/17/25*1200*2400mm
Specie	Eucalyptus
Glue	phenolic glue
Grade of Veneer	CD
MOE	14000Mpa
Moisture Content	6%-12%
Formeldehyde Emission	E0
Standard	AS/NZS 6669

Key benefits of Fuqing F17 Formply varieties:

- **High Strength (F17 Rating)** ——Designed for heavy-duty applications.
- **Water & Weather Resistance**——Ideal for outdoor and wet conditions.
- **Smooth Film Surface**——Provides excellent concrete finishes.
- **Reusable & Cost-Effective**——Can be used multiple times, reducing costs.
- **Meets Australian Standards**——Ensures quality, safety, and reliability.



Office: Fuqing Shanghai
Address: No.2902 Room, 166 Street, Minhong Road, Minhang District, Shanghai
Factory location in China: Fuqing Wood
Address: Changfu Road, Lanhong Village, Qingyihu Town, Shuyang County, Jiangsu, China
Factory location in Vietnam: Fuqing Vietnam
Address: Heyi Village, Shengxing town, Anping County, Yenbai Province, Vietnam
Tel: 0527-8063 3096
E-mail: postmaster@fuqingmuye.com
Web: <http://www.fuqingmuye.com>

Key applications of Fuqing F17 Formply

■ I A. Concrete Formwork

One of the primary uses of F17 Formply is in concrete formwork. Its high strength and smooth surface make it ideal for casting concrete slabs, columns, and beams. The phenolic coating prevents concrete from sticking, ensuring a clean finish and reducing labor costs.

■ I B. Structural Applications


F17 Formply is commonly used in temporary and permanent structural work due to its high load-bearing capacity. It is perfect for bridges, tunnels, scaffolding platforms, and heavy-duty flooring where strength is crucial.

■ I C. Industrial & Commercial Construction

Due to its water-resistant properties, F17 Formply is used in warehouse flooring, hoardings, and retaining walls. It performs well in moist or outdoor environments, ensuring long-term durability.

■ I D. Transport & Storage

F17 Formply is also used for truck flooring, trailer linings, and industrial storage units, as it can withstand heavy loads and frequent wear.

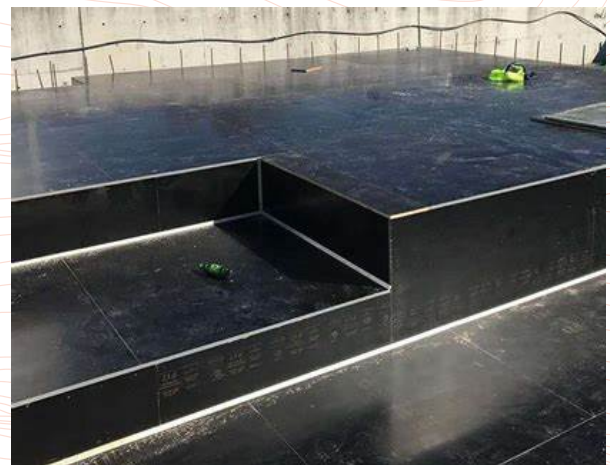

Fuqing F22 bracing plywood



F22 Bracing plywood is a type of plywood that is made from high-quality hardwood veneers that are bonded together with a waterproof adhesive. This plywood is manufactured to meet the Australian and New Zealand Standards AS/NZS 2269, which means that it has been tested and certified to meet certain performance requirements.

One of the key features of bracing structural F22 hardwood plywood is its strength. The F22 rating means that this plywood has a minimum stress grade of F22, which translates to a bending stress of 22 megapascals (Mpa). This makes it suitable for use in applications that require high levels of strength and stiffness, such as bracing and structural applications.



Office: Fuqing Shanghai

Address: No.2902 Room, 166 Street, Minhong Road, Minhang District, Shanghai

Factory location in China: Fuqing Wood

Address: Changfu Road, Lanhong Village, Qingyihu Town, Shuyang County, Jiangsu, China

Factory location in Vietnam: Fuqing Vietnam

Address: Heyi Village, Shengxing town, Anping County, Yenbai Province, Vietnam

Tel: 0527-8063 3096

E-mail: postmaster@fuqingmuye.com

Web: <http://www.fuqingmuye.com>

Fuqing F22 bracing plywood Specification

F22 bracing plywood	
Specification	4*900*2440/2745/3050mm 4*1200*2440/2745/3050mm
Specie	Eucalyptus
Glue	phenolic glue
Grade of Veneer	CD
MOE	17000Mpa
Moisture Content	6%-12%
Formeldehyde Emission	E0
Standard	AS/NZS 2269

Key benefits of Fuqing F22 bracing plywood varieties:

- **High strength and stiffness:** As mentioned,F22 Bracing plywood is designed to offer excellent strength and stiffness, making it ideal for use in structural and bracing applications.
- **Water-resistant:** F22 Bracing plywood is manufactured with a waterproof adhesive, which means that it is resistant to water and moisture. This makes it ideal for use in damp or humid environments.
- **Durable:** F22 Bracing plywood is known for its durability and longevity. With proper installation and maintenance, F22 Bracing plywood can last for many years.
- **Versatile:** F22 Bracing plywood can be used in a wide range of applications, from residential and commercial construction to industrial and marine applications.
- **Sustainable:** F22 Bracing plywood is a sustainable building material that is made from renewable resources.
This makes it an eco-friendly choice for environmentally-conscious builders.



Office:Fuqing Shanghai

Address: No.2902 Room,166 Street,Minhong Road,Minhang District,Shanghai

Factory location in China:Fuqing Wood

Address:Changfu Road,Lanhong Village,Qingyihu Town,shuyang County,Jiangsu,China

Factory location in Vietnam:Fuqing Vietnam

Address:Heyi Village,shengxing town,Anping County,Yenbai Province,vietnam

Tel:0527-8063 3096

E-mail:postmaster@fuqingmuye.com

Web:http://www.fuqingmuye.com

Key applications of Fuqing F22 bracing plywood

■ I A.Roofing and flooring:

F22 Bracing plywood can be used as a base for roofing and flooring materials, providing a stable and strong foundation for tiles, shingles, and other materials.

■ I B.Wall and ceiling sheathing:

F22 Bracing plywood can also be used as a sheathing material for walls and ceilings, providing added strength and stiffness to the structure.

■ I C.Bracing:

F22 Bracing plywood is ideal for use in bracing applications, such as wall bracing, roof bracing, and floor bracing.

■ I D.Formwork:

F22 Bracing plywood can also be used as a formwork material for concrete, providing a smooth and even surface for pouring and shaping the concrete.



Fuqing Non-Structural plywood



Unlike structural plywood, non-structural plywood such as interior Bendy Ply is largely intended for lighter purposes, namely in small furniture production and other applications where your finished product isn't intended to be load-bearing.

This isn't to say that non-structural plywood is weaker or more brittle than structural plywood. On the contrary, there are plenty of non-structural plywood types that are actually more flexible or malleable than structural plywood. Whilst this flexibility or plywood bendiness doesn't make some structural plywood types suitable for carrying heavier loads, these bendier plywood panels can be used to make dynamic pieces of furniture and other interior design elements.



Office: Fuqing Shanghai
Address: No.2902 Room, 166 Street, Minhong Road, Minhang District, Shanghai
Factory location in China: Fuqing Wood
Address: Changfu Road, Lanhong Village, Qingyihu Town, Shuyang County, Jiangsu, China
Factory location in Vietnam: Fuqing Vietnam
Address: Heyi Village, Shengxing town, Anping County, Yenbai Province, Vietnam
Tel: 0527-8063 3096
E-mail: postmaster@fuqingmuye.com
Web: <http://www.fuqingmuye.com>

Fuqing Non-structural plywood Specification

Non-structural plywood	
Specification	6-25*1200*2400mm 6-25*1220*2440mm 6-25*1250*2500mm
Specie	Radiata pine,pine,eucalyptus
Glue	Urea-formaldehyde glue
Grade of Veneer	CD
Moisture Content	8%-15%
Formeldehyde Emission	E0
Standard	AS/NZS 2269

Key benefits of Fuqing Non-structural plywood varieties:

- Visually pleasing—non-structural plywood is great for applications where design is the key purpose
- Where structural requirements are not a concern, more focus can be weighted towards both appearance and versatility with non structural plywood varieties
- It can be a lightweight option
- Non structural plywood can be more cost-effective
- For design and decorative applications, non-structural plywood is a great option for visual projects



Office: Fuqing Shanghai
Address: No.2902 Room, 166 Street, Minhong Road, Minhang District, Shanghai
Factory location in China: Fuqing Wood
Address: Changfu Road, Lanhong Village, Qingyihu Town, Shuyang County, Jiangsu, China
Factory location in Vietnam: Fuqing Vietnam
Address: Heyi Village, Shengxing town, Anping County, Yenbai Province, Vietnam
Tel: 0527-8063 3096
E-mail: postmaster@fuqingmuye.com
Web: <http://www.fuqingmuye.com>

Key applications of Fuqing Non-structural plywood

Non structural plywood, sometimes referred to as interior plywood, is mostly used for decorative and aesthetic finishes and applications, such as wall and ceiling linings. Non structural plywood, being intended for use in non structural applications, is mostly applied where a high-quality visual finish is required such as panelling, joinery and furniture.



Fuqing Structural plywood



As its name suggests, structural plywood refers to any type of plywood that's manufactured to provide superior strength and durability, making it suitable for a variety of different structural applications.

Structural-grade plywood may boast more wood plies or wood layers to boost the strength and durability of those wood panels. You're also more likely to find structural plywood products with cores made of denser wood materials like radiata, hoop pine or birch.



Office: Fuqing Shanghai

Address: No.2902 Room, 166 Street, Minhong Road, Minhang District, Shanghai

Factory location in China: Fuqing Wood

Address: Changfu Road, Lanhong Village, Qingyihu Town, Shuyang County, Jiangsu, China

Factory location in Vietnam: Fuqing Vietnam

Address: Heyi Village, Shengxing town, Anping County, Yenbai Province, Vietnam

Tel: 0527-8063 3096

E-mail: postmaster@fuqingmuye.com

Web: <http://www.fuqingmuye.com>

Fuqing Structural plywood Specification

Structural plywood			
Grade	F8	F11	F14
Specification	7-25*1200*2400mm 7-25*1200*2700mm	7-25*1200*2400mm 7-25*1200*2700mm	7-25*1200*2400mm
Specie	Radiata pine	Radiata pine, eucalyptus	Larch
Glue	phenolic glue	phenolic glue	phenolic glue
Grade of Veneer	CD	CD	CD
MOE	9100Mpa	10500Mpa	12000Mpa
Moisture Content	8%-15%	6%-12%	6%-12%
Formeldehyde Emission	E0	E0	E0
Standard	AS/NZS 2269	AS/NZS 2269	AS/NZS 2269

Key benefits of Fuqing structural plywood varieties:

- Resistant to chemicals, corrosion, and damage
- Resistant to exposure to the elements such as heat, cold, and humidity
- 2x shear carrying capacity compared to timber
- Offers dimensional stability to a high degree
- Offers a high strength to stiffness to weight ratio
- Allows nails close to panel edges



Office: Fuqing Shanghai
Address: No.2902 Room, 166 Street, Minhong Road, Minhang District, Shanghai
Factory location in China: Fuqing Wood
Address: Changfu Road, Lanhong Village, Qingyihu Town, Shuyang County, Jiangsu, China
Factory location in Vietnam: Fuqing Vietnam
Address: Heyi Village, Shengxing town, Anping County, Yenbai Province, Vietnam
Tel: 0527-8063 3096
E-mail: postmaster@fuqingmuye.com
Web: <http://www.fuqingmuye.com>

Key applications of Fuqing structural plywood

As you'd expect from the inclusion of flooring grades, structural plywood can be used for interior flooring and cladding as well as the construction of trailer floors, ramps, external stair treads, and even horse stalls and other stabling infrastructure. Structural plywood can also be used in commercial contexts for shopfitting, office interior and exterior cladding, and in the development of other transportation infrastructure like truck beds and load-bearing pallets.

